

The **BIG SPLASH**


Set-Up & Safety Instructions



1 800 637-3656

www.twisterdisplay.com


Parts List

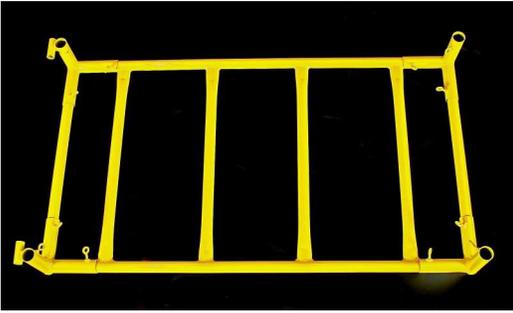

Base Unit: Quantity-1



**Tires (with 5/8 bolts
and lock nuts):
Quantity-2**

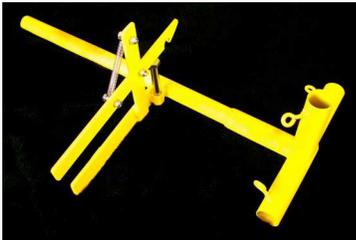

**Trigger Unit:
Quantity-1**



**Bucket Assembly:
Quantity-1**



Collar: Quantity-1



**Corner Fitting:
Quantity-3**




24" Pipe: Quantity-1




44.5" Tapered Pipe: Quantity-4




41.5" Pipe: Quantity-6

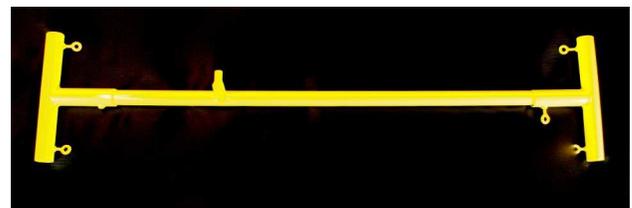

Target Cross Brace: Quantity-1

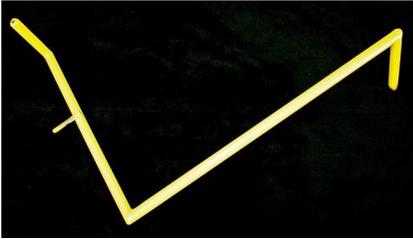

Target Arm: Quantity-1



**Filler Tube Hook:
Quantity-1**



Target: Quantity-1




**Filler Tube:
Quantity-1**



**Filler Tube
Clips:
Quantity-3**



**Sponge Balls:
Quantity-12**

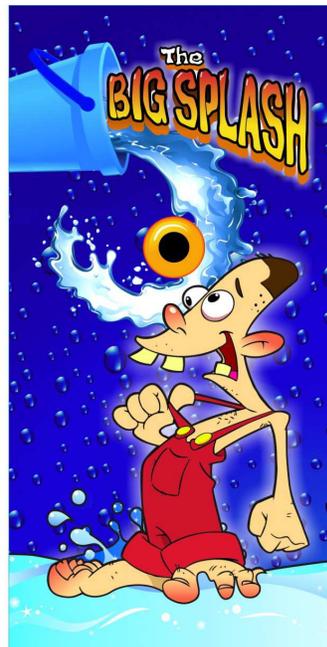

**Vinyl Canvas:
Quantity-1**

Assembly Instructions



Attach tires to the base unit, with the 5/8" bolt and lock nut. (The nut goes on the inside side of the tire.)



Insert a 44.5" tapered pipe in each corner fitting of the base unit. (The tapered end goes up.)





Put the target arm cross brace onto two of the tapered pipes. (The cross brace will be slid up to meet the target arm hole, once the canvas is attached.)

IMPORTANT NOTE: *The arm pivot goes on the inside and is on the opposite side from the wheels.*



Insert a 41.5" pipe onto each tapered pipe .





Step 5

Slide the bucket assembly onto the trigger unit. Make sure that it is positioned so that the roller engages with the trigger hook.



Step 6

Slide on the collar and tighten.



Step 8

Insert the remaining 41.5" pipes into the corner fitting and tighten.



Step 9

Place the remaining two corner fittings onto either end of the 24" pipe. Be sure to slide them completely on, but do not tighten. Attached these corner fittings to the opposite ends of the 41.5" pipes. (Leaving the corner fittings loose will help to guide them onto the pipes.) Tighten all fittings.



Step 7

Slide on a corner fitting and tighten.



Step 10

Tip the unit onto its side. Block the tires and find items to elevate the unit about a foot or so. Place the top on the unit, and tighten.



Insert filler tube hook and tighten.



Attach filler tube. Use the clips to route the filler tube along the frame .



Attach the canvas to the frame with the Velcro straps. (You may now need to slide the cross brace up to meet the hole for the target arm.)

Step 14



Attach the garden hose to the connector/valve.



Safety Instructions

- ◆ **Never use baseballs or hard balls. (Use only the balls provided.)**
- ◆ **Set up on level ground.**
- ◆ **Keep Big Splash staked and/or sandbagged for stability.**
- ◆ **Keep Big Splash away from electricity.**
- ◆ **Never stand under the bucket when in use.**
- ◆ **Do not allow anyone to climb on or lean against the Big Splash.**
- ◆ **Do not allow anyone to hit the target with their hand.**
- ◆ **Take down the Big Splash if there is high wind or chance of lightning.**

1 800 637-3656

www.twisterdisplay.com

Big Splash Replacement Parts

Base Unit — \$85

Bucket Assembly — \$38

Canvas — \$199

Collar — \$8

Corner Fitting — \$12

Filler Tube — \$22

Filler Tube Clip — \$15

Filler Tube Hook — \$18

Pipe 24" — \$8

Pipe 41.5" — \$10

Pipe 44.5" (tapered) — \$12

Target — \$18

Target Arm — \$40

Target Cross Brace — \$38

Sponge Ball — \$2 (each)

Tire — \$30

Trigger Unit — \$60

1 800 637-3656

www.twisterdisplay.com